

CERTIFICATE

of constancy of performance

1922 - CPR - 1275

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

Fire detection and fire alarm systems. Manual call points. Short - circuit isolators. Addressable Manual call point with Short Circuit Isolator - D9000A MCP

(For list of controlled characteristics, see Annexes I and II to 1922 - CPR - 1275 that are an inseparable part of this certificate)

produced by

DMTech Ltd.

1 Ekzarh Yosif Str., 5800 Pleven, Bulgaria

and produced in the manufacturing plant of

DMTech Ltd.


16 Nikolay Haytov Str., 5806 Pleven, Bulgaria

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

EN 54-11:2001, EN 54-11:2001/A1:2005 and EN 54-17:2005, EN 54-17:2005/AC:2007

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

This certificate was first issued on 01.11.2019 and will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address www.dedal-bg.net.

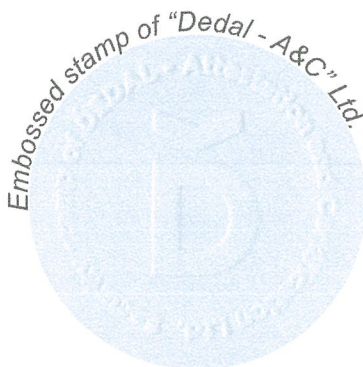

Manager:

Anna Vasileva


Issued:
Burgas, 09 June 2020

dipl. eng. Anna Vasileva

ANNEX I TO CERTIFICATE OF CONFORMITY OF CONSTANCY OF PERFORMANCE 1922-CPR-1275/ 09.06.2020

EN 54-11:2001; EN 54-11:2001/A1:2005

Essential characteristic	Performance	Clause
Nominal activation conditions / Sensitivity and Performance under fire conditions		
- Alarm condition	Pass	4.3.2
- Indicators for alarm condition	Pass	4.4
- Safety aspects	Pass	4.7.1
- Protection against accidental operation	Pass	4.7.4
- Operational performance test	Pass	5.2
- Function test	Pass	5.3
Operational reliability		
- Marking and data	Pass	4.2
- Normal condition	Pass	4.3.1
- Reset facility	Pass	4.5
- Test facility	Pass	4.6
- Shape, dimensions and colours	Pass	4.7.2
- Symbols and lettering	Pass	4.7.3
- Environment category	Pass	4.7.5
- Additional requirements for software controlled manual call points	N/A	4.8
- Test facility test (operational)	Pass	5.4
- Reliability test (endurance)	Pass	5.5
Durability of operational reliability, temperature resistance		
- Dry heat (operational)	Pass	5.7
- Dry heat (endurance)	N/A	5.8
- Cold (operational)	Pass	5.9
Durability of operational reliability, vibration resistance		
- Shock (operational)	Pass	5.14
- Impact (operational)	Pass	5.15
- Vibration, sinusoidal (operational)	Pass	5.16
- Vibration, sinusoidal (endurance)	Pass	5.17
Durability of operational reliability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	5.10
- Damp heat, cyclic (endurance)	N/A	5.11
- Damp heat, steady state (endurance)	Pass	5.12
- Enclosure protection	N/A	5.19
Durability of operational reliability, corrosion resistance		
- Damp heat, cyclic (endurance)	N/A	5.11
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	5.13
Durability of operational reliability, electrical stability		
- Variation of supply parameters	Pass	5.6
- Electromagnetic compatibility (EMC), (operational)	Pass	5.18

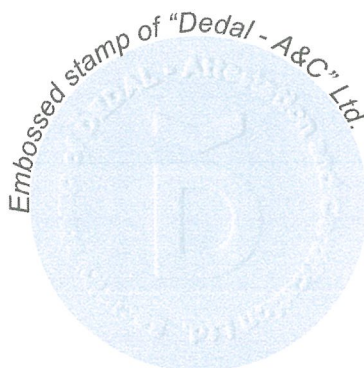

Manager:

Anna Vasileva

Issued:
Burgas, 09 June 2020


dipl. eng. Anna Vasileva

**ANNEX II TO CERTIFICATE OF CONFORMITY OF CONSTANCY OF PERFORMANCE
1922-CPR-1275/ 09.06.2020**

Performance list, acc. to EN 54-17:2005, EN 54-17:2005/AC:2007

Essential Characteristics	Performance	Clause
Performance under fire conditions		
- Reproducibility	Pass	5.2
Operational reliability		
- Requirements	Pass	4
Durability of operational reliability, temperature resistance		
- Dry heat (operational)	Pass	5.4
- Cold (operational)	Pass	5.5
Durability of operational reliability, vibration resistance		
- Shock (operational)	Pass	5.9
- Impact (operational)	Pass	5.10
- Vibration, sinusoidal (operational)	Pass	5.11
- Vibration, sinusoidal (endurance)	Pass	5.12
Durability of operational reliability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	5.6
- Damp heat, steady state (endurance)	Pass	5.7
Durability of operational reliability, corrosion resistance		
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	5.8
Durability of operational reliability, electrical stability		
- Variation of supply parameters	Pass	5.3
- Electromagnetic compatibility (EMC), immunity tests (operational)	Pass	5.13

This certificate was first issued on 01.11.2019 and will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address www.dedal-bg.net.

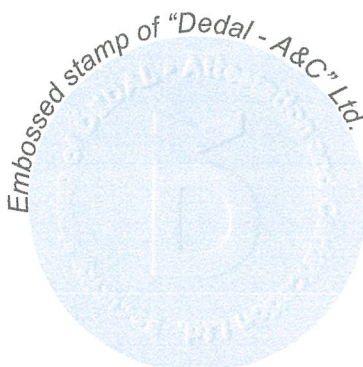

Manager:

Issued:
Burgas, 09 June 2020

dipl. eng. Anna Vasileva